BMW F48 X1 xDrive18d SAV / Repair Manuals and Technical Data / 51 Body equipment / 51 47 Floor/luggage compartment/engine compartment, trim panel /

51 47 161 Removing and installing/replacing right luggage compartment wheel arch panel




Necessary preliminary tasks:

- Remove <u>cover from tail panel</u>
- Remove <u>luggage compartment light</u>



Removal:

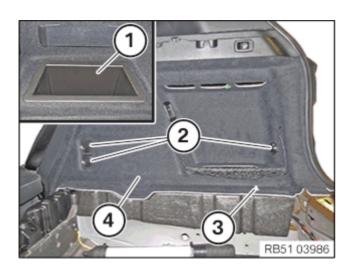

Lift out storage compartment (1) upwards.

Lever out lashing eye covers (2) and loosen screws underneath.


Remove the lashing eyes (2).

Remove the pin (3).

Remove the trim panel (4) towards the inside and in this process, disconnect the plug connections.



Installation:



Insert the trim panel (4) and in this process, connect the plug connections.

Tighten the pin (3).

Tightening torque 51 47 6AZ.

Install lashing eyes (2) and tighten screws.

Tightening torque 51 47 1AZ.

Install lashing eye covers (2).

Install storage compartment (1).



Required follow-up work:

- Install <u>cover on tail panel</u>
- Install <u>luggage compartment light</u>

For informational purposes only. The information on this website is provided AS-IS with no warranties, express or implied, and is not guaranteed to be error-free, up-to-date or complete. NewTIS and BMW assume no liability for any loss or damage arising from the use or reliance on the information and content on this website. The content on this website is subject to change without notice.